


Attention!  
Changed  
installation  
of second  
scissors

Attention!  
Modified  
installation  
of the faulty  
operation lock

Centre  
window

Centre  
additional lock

Attention!  
Modified  
installation  
of the  
overrun  
device

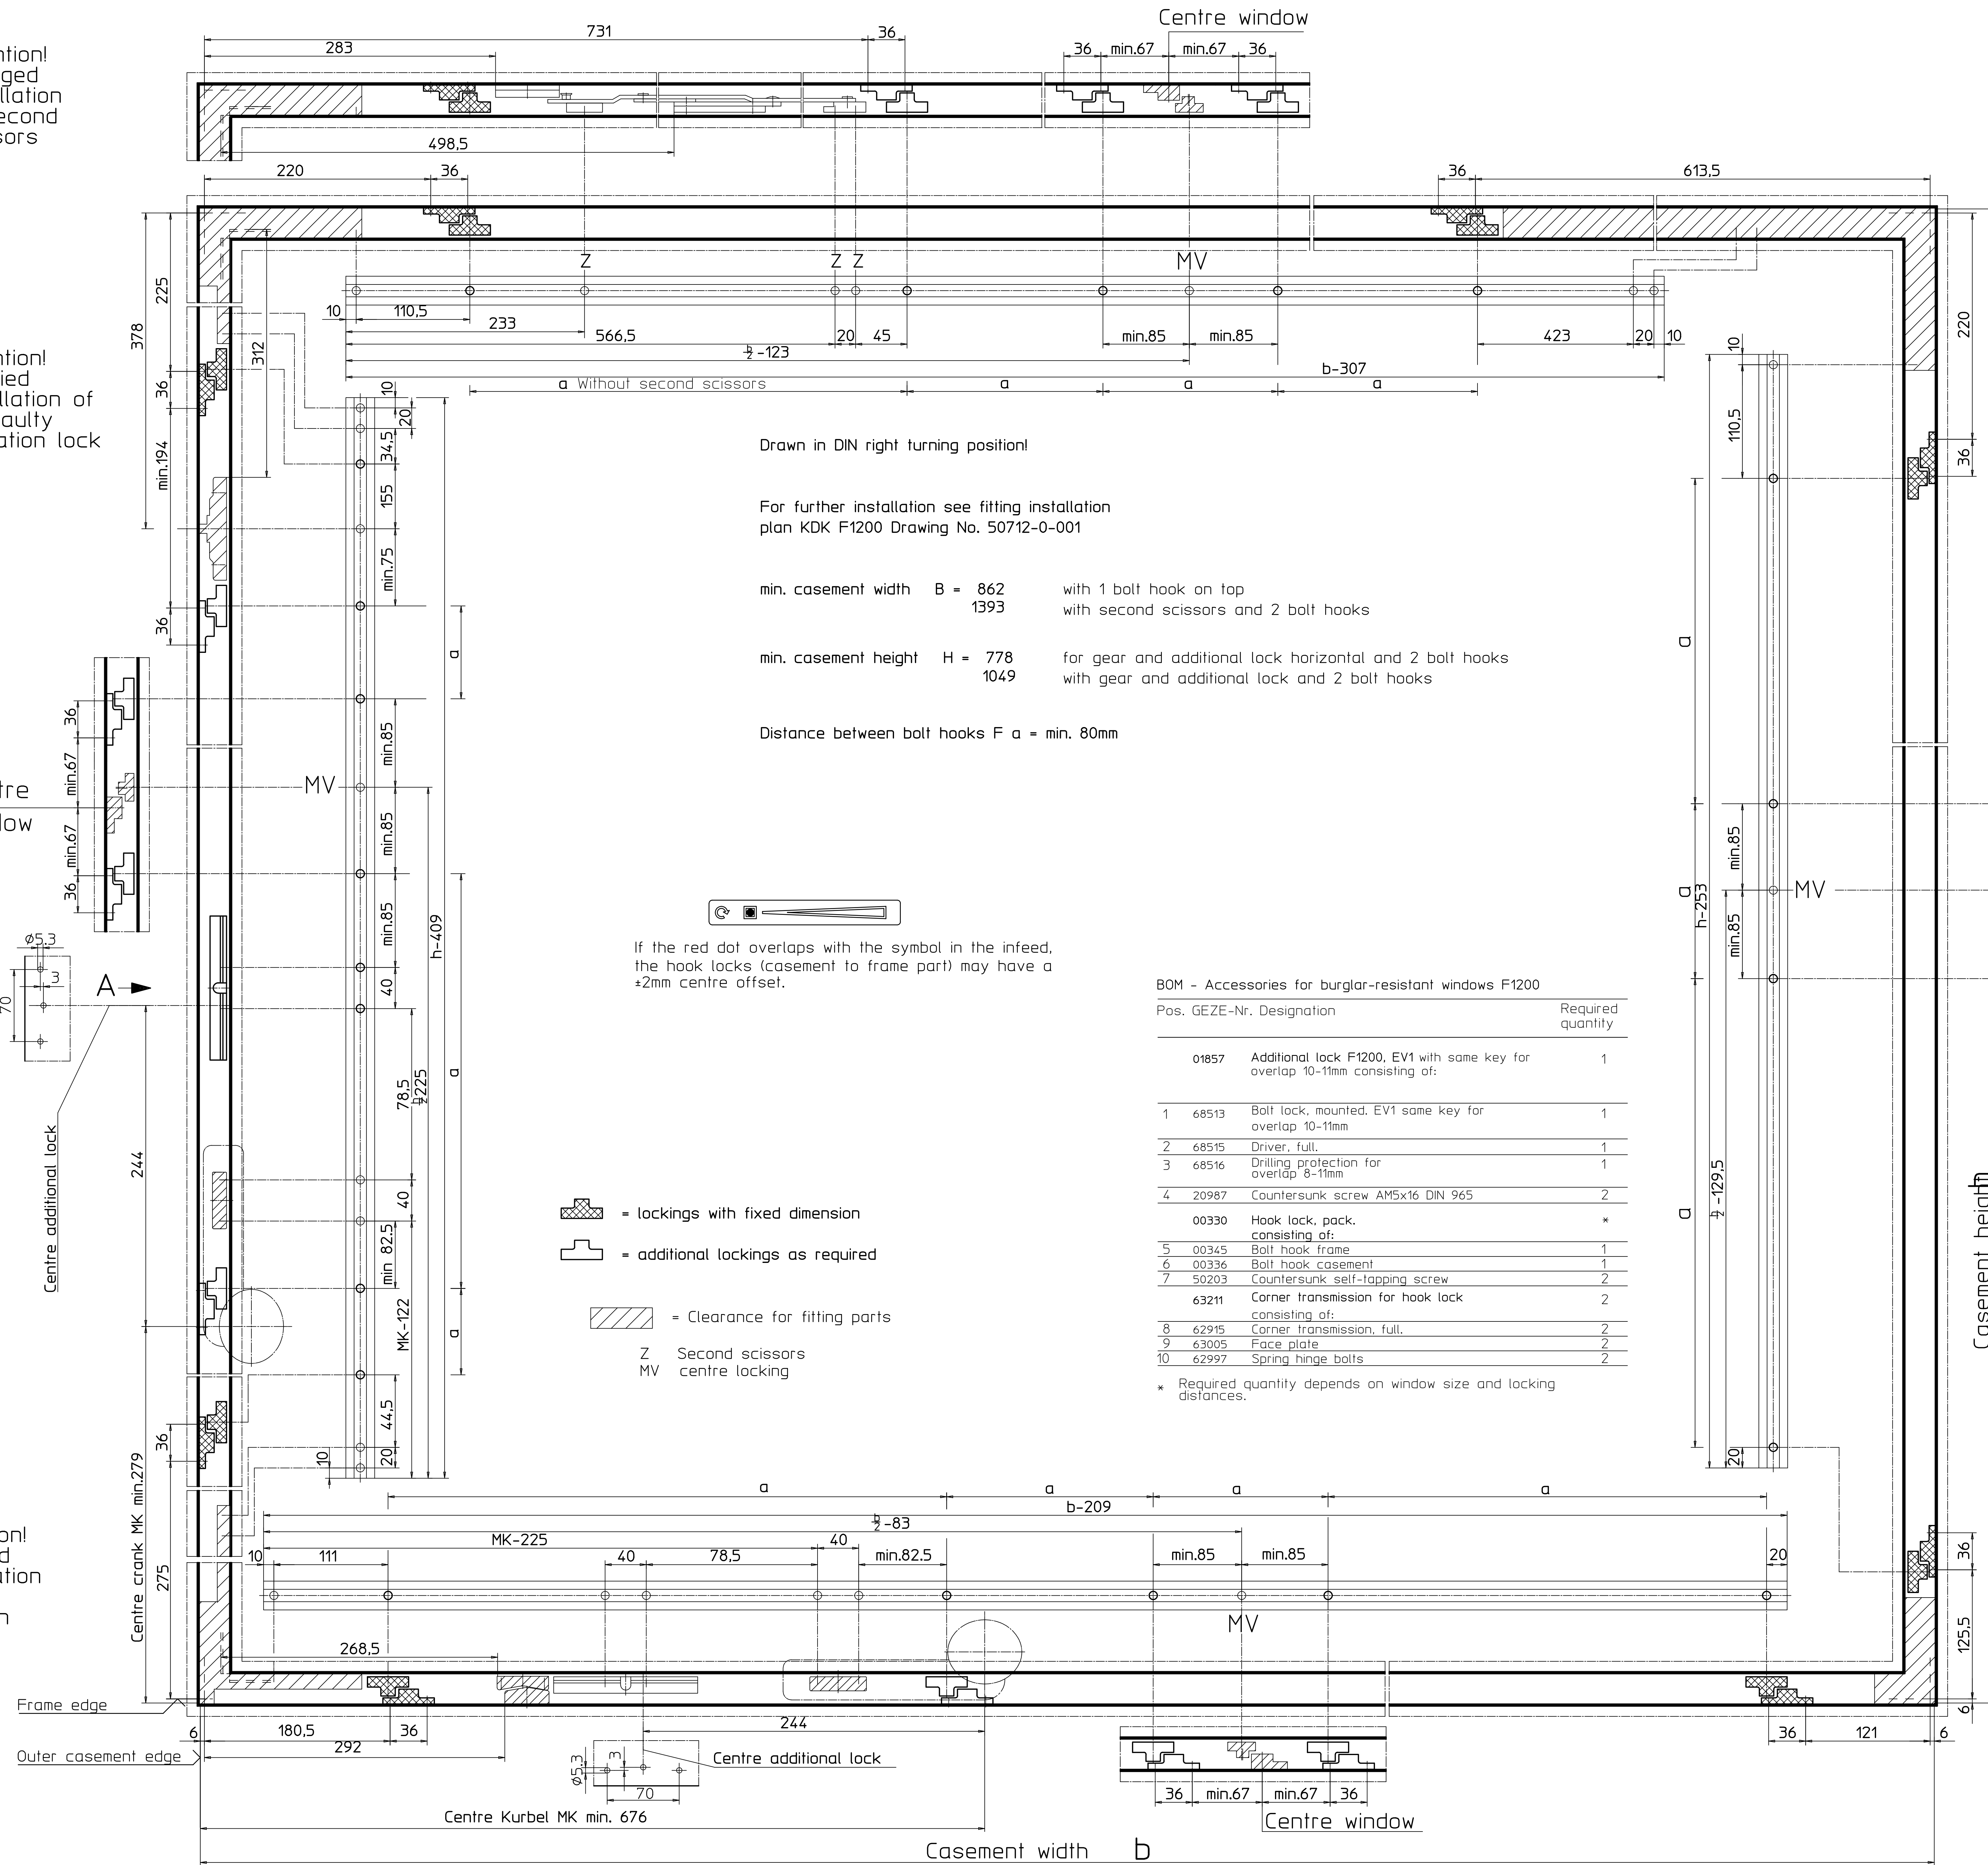

Drawn in DIN right turning position!

For further installation see fitting installation  
plan KDK F1200 Drawing No. 50712-0-001

min. casement width B = 862 with 1 bolt hook on top  
1393 with second scissors and 2 bolt hooks

min. casement height H = 778 for gear and additional lock horizontal and 2 bolt hooks  
1049 with gear and additional lock and 2 bolt hooks

Distance between bolt hooks F a = min. 80mm

- = lockings with fixed dimension
- = additional lockings as required
- = Clearance for fitting parts
- Z Second scissors
- MV centre locking

BOM - Accessories for burglar-resistant windows F1200

Pos.	GEZE-Nr.	Designation	Required quantity
	01857	Additional lock F1200, EV1 with same key for overlap 10-11mm consisting of:	1
1	68513	Bolt lock, mounted, EV1 same key for overlap 10-11mm	1
2	68515	Driver, full.	1
3	68516	Drilling protection for overlap 8-11mm	1
4	20987	Countersunk screw AM5x16 DIN 965	2
	00330	Hook lock, pack, consisting of:	*
5	00345	Bolt hook frame	1
6	00336	Bolt hook casement	1
7	50203	Countersunk self-tapping screw	2
	63211	Corner transmission for hook lock consisting of:	2
8	62915	Corner transmission, full.	2
9	63005	Face plate	2
10	62997	Spring hinge bolts	2

\* Required quantity depends on window size and locking distances.

